



**HIGH
FORMAT®**

SAHARA



HIGHFORMAT.COM
(877) 777-6558

FEATURES

- High-quality natural travertine pavers in swirls of soft, milky creams and white
- Antiqued finish has aged look with smooth surface and tumbled edges

MATERIAL**TRAVERTE****TEXTURE**

ANTIQUED

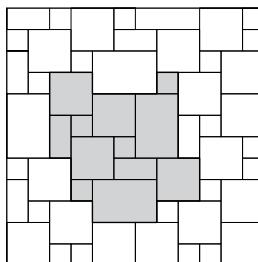
**TECHNICAL SPECIFICATIONS**

Compressive Strength:	9,967 psi
Flexural Strength:	3,261 psi
Coefficient of Friction:	1.2 dry
Freeze and Thaw:	Pass
Water Absorption by Volume:	1.892 gr/cm ³
Dry Unit Weight:	2.263 gr/cm ³
Saturated Unit Weight:	2.339 gr/cm ³
Real Density:	2.411 gr/cm ³
Apparent Porosity:	1.33%
Total Porosity:	3.15%
Scratch Hardness:	4 mohs
Wide Wheel Abrasion Value:	20.16 mm
Reaction to Fire:	Nonreactive

PATTERNS | UNITS

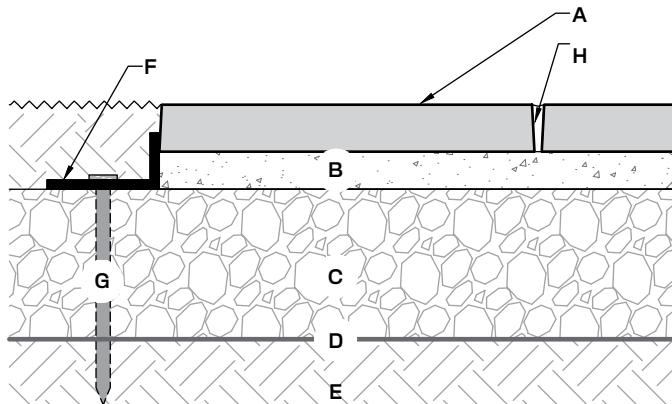
- French Pattern: Blend of 8"x8", 8"x16", 16"x16", 16"x24" at 1.25"H 176 s.f. per crate / 2,684± lbs

Contact your local rep for additional sizes and finishes.

PATTERN**FRENCH****NOTES FOR TYPICAL RESIDENTIAL INSTALLATION**

This page shows typical installations for pavers.

- Drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.**
- Block size and placement shown are for reference only, individual blocks vary with installation pattern.
- Section shown is the minimum recommendation for pedestrian loading. Projects with heavier traffic or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
- Provide adequate surface drainage to prevent ponded water.

TYPICAL RESIDENTIAL PEDESTRIAN INSTALLATION

- Natural stone pavers, thickness varies
- 1" screed clean angular stone, 1/8" to 1/4"
- 6" of 3/4" clean stone, compacted in 3-4" lifts
- Woven geotextile fabric (recommended)
- Compacted subgrade soil
- Low profile paver edge restraint
- Steel spike
- Optional joint sand (ASTM C144)