HIGH FORMAT®

DIMENSIONAL FLAGSTONE

HIGHFORMAT.COM
(877) 777-6558

DIMENSIONAL FLAGSTONE

FEATURES

- Six unique shapes with 24 unique stone textures
- Uniform thickness and accurate dimensions translates into fast installation and a beautiful end result

MATERIAL

ROSETTA® WETCAST VIBRALOCK®

COLOR OPTIONS

BLUESTONE

FOND DU LAC

SLATE GRAY

LIMESTONE

TERRAIN

Refer to our website for the most recent color offerings.

PATTERN



PALLET



Weight:	2,350± lbs (inc. pallet)
Coverage:	98 sq ft
Layers Per Pallet:	8
Section:	12.25 sq ft per layer



UNIT: 24 X 24

Dimensions:	24"L x 24"W x 2"H
Weight:	96 lbs
Coverage:	4 sq ft
Units Per Pallet:	8



UNIT: 24 X 18

Dimensions:	24"L x 18"W x 2"H
Weight:	72 lbs
Coverage:	3 sq ft
Units Per Pallet:	8



UNIT: 18 X 18

Dimensions:	18"L x 18"W x 2"H
Weight:	54 lbs
Coverage:	2.25 sq ft
Units Per Pallet:	8



UNIT: 18 X 12

Dimensions:	18"L x 12"W x 2"H
Weight:	36 lbs
Coverage:	1.5 sq ft
Units Per Pallet:	8

UNIT: 12 X 12

Dimensions:	12"L x 12"W x 2"H
Weight:	24 lbs
Coverage:	1 sq ft
Units Per Pallet:	8

UNIT: 12 X 6

Dimensions:	12"L x 6"W x 2"H
Weight:	12 lbs
Coverage:	.5 sq ft
Units Per Pallet:	8

NOTES FOR TYPICAL RESIDENTIAL INSTALLATION

This page shows a typical detail for Dimensional Flagstone.

- This drawing is for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.
- Block size and placement shown are for reference only, individual blocks vary with installation pattern and product.
- Section shown is the minimum recommendation for pedestrian loading. Projects with heavier loads or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
- Provide adequate surface drainage to prevent ponded water.

Not suitable for vehicular traffic.

TYPICAL RESIDENTIAL INSTALLATION

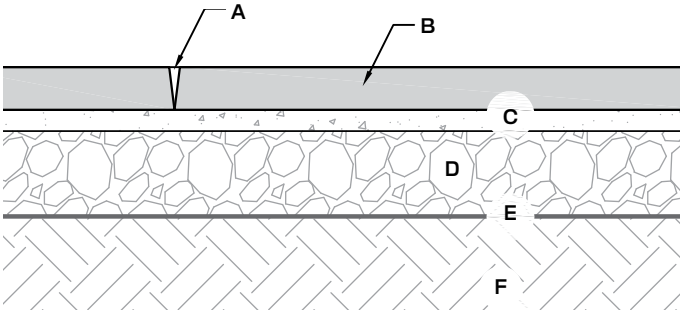

A. Polymeric jointing sand between slabs
B. Dimensional Flagstone Slabs (2" thick)
C. Bedding sand (ASTM C33 Fine Aggregate) 1" thick
D. Dense graded aggregate base (ASTM D2940) min. 4" thick, compacted
E. Woven geotextile (optional)
F. Suitable, compacted subgrade

HIGHFORMAT.COM
(877) 777-6558