



**HIGH  
FORMAT®**

**MONTROSE SLABS**



[Learn More](#)


**HIGHFORMAT.COM**  
**(877) 777-6558**



## FEATURES

- Massive dimensions and lightweight for rapid installation
- Made with TEKTRAMAT® for unsurpassed durability and a salt-proof surface, with four times the compressive strength and twice the flexural strength of normal concrete
- Stylish modern aesthetic, featuring clean lines and thermalled stone textures

## PALLET

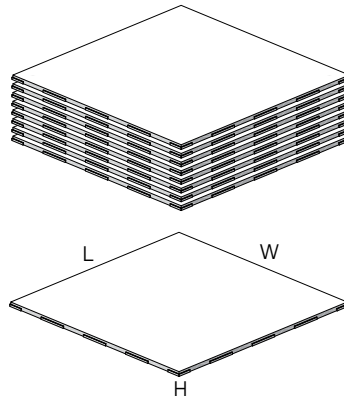

Dimensions: 66"L x 48"W x 18"H  
 Weight: 1,300 lbs (inc. pallet)  
 Coverage: 98 sq ft  
 Layers Per Pallet: 8

## UNIT

Dimensions: 42"L x 42"W x 1"H  
 Weight: 150 lbs  
 Coverage: 12.25 sq ft  
 Units Per Pallet: 8

## MATERIAL

TEKTRAMAT®


## COLOR OPTIONS




Refer to our website for the most recent color offerings.

## PATTERNS


### STACK BOND




### STACK BOND (4" JOINT)



### RUNNING BOND




### RUNNING BOND (4" JOINT)



## GENERAL NOTES FOR TYPICAL RESIDENTIAL INSTALLATION

This page shows a typical detail for Montrose Slabs.

- This drawing is for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.
- Block size and placement shown are for reference only, individual blocks vary with installation pattern.
- Section shown is the minimum recommendation for pedestrian loading. Projects with heavier traffic or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
- Provide adequate surface drainage to prevent ponded water.

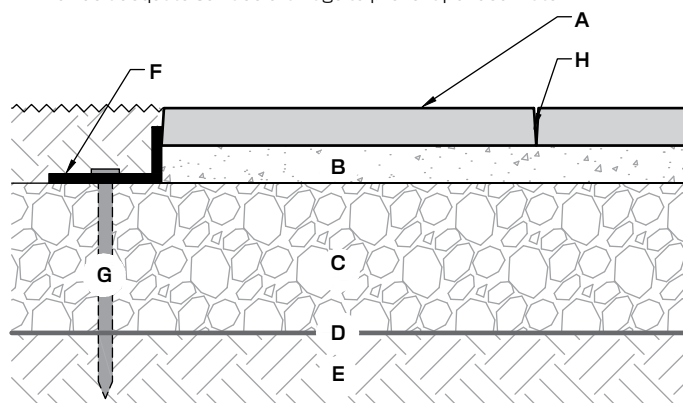

- A. Montrose Slab, 1" (25mm) thick
- B. Bedding sand (ASTM C33) min. 1" (25mm)
- C. Dense graded base, min. 4" (100mm), compacted
- D. Woven geotextile fabric (recommended)
- E. Compacted subgrade soil
- F. Low profile paver edge restraint
- G. Steel spike
- H. Joint sand (ASTM C144)