




HIGH
FORMAT®

DIMENSIONAL FLAGSTONE

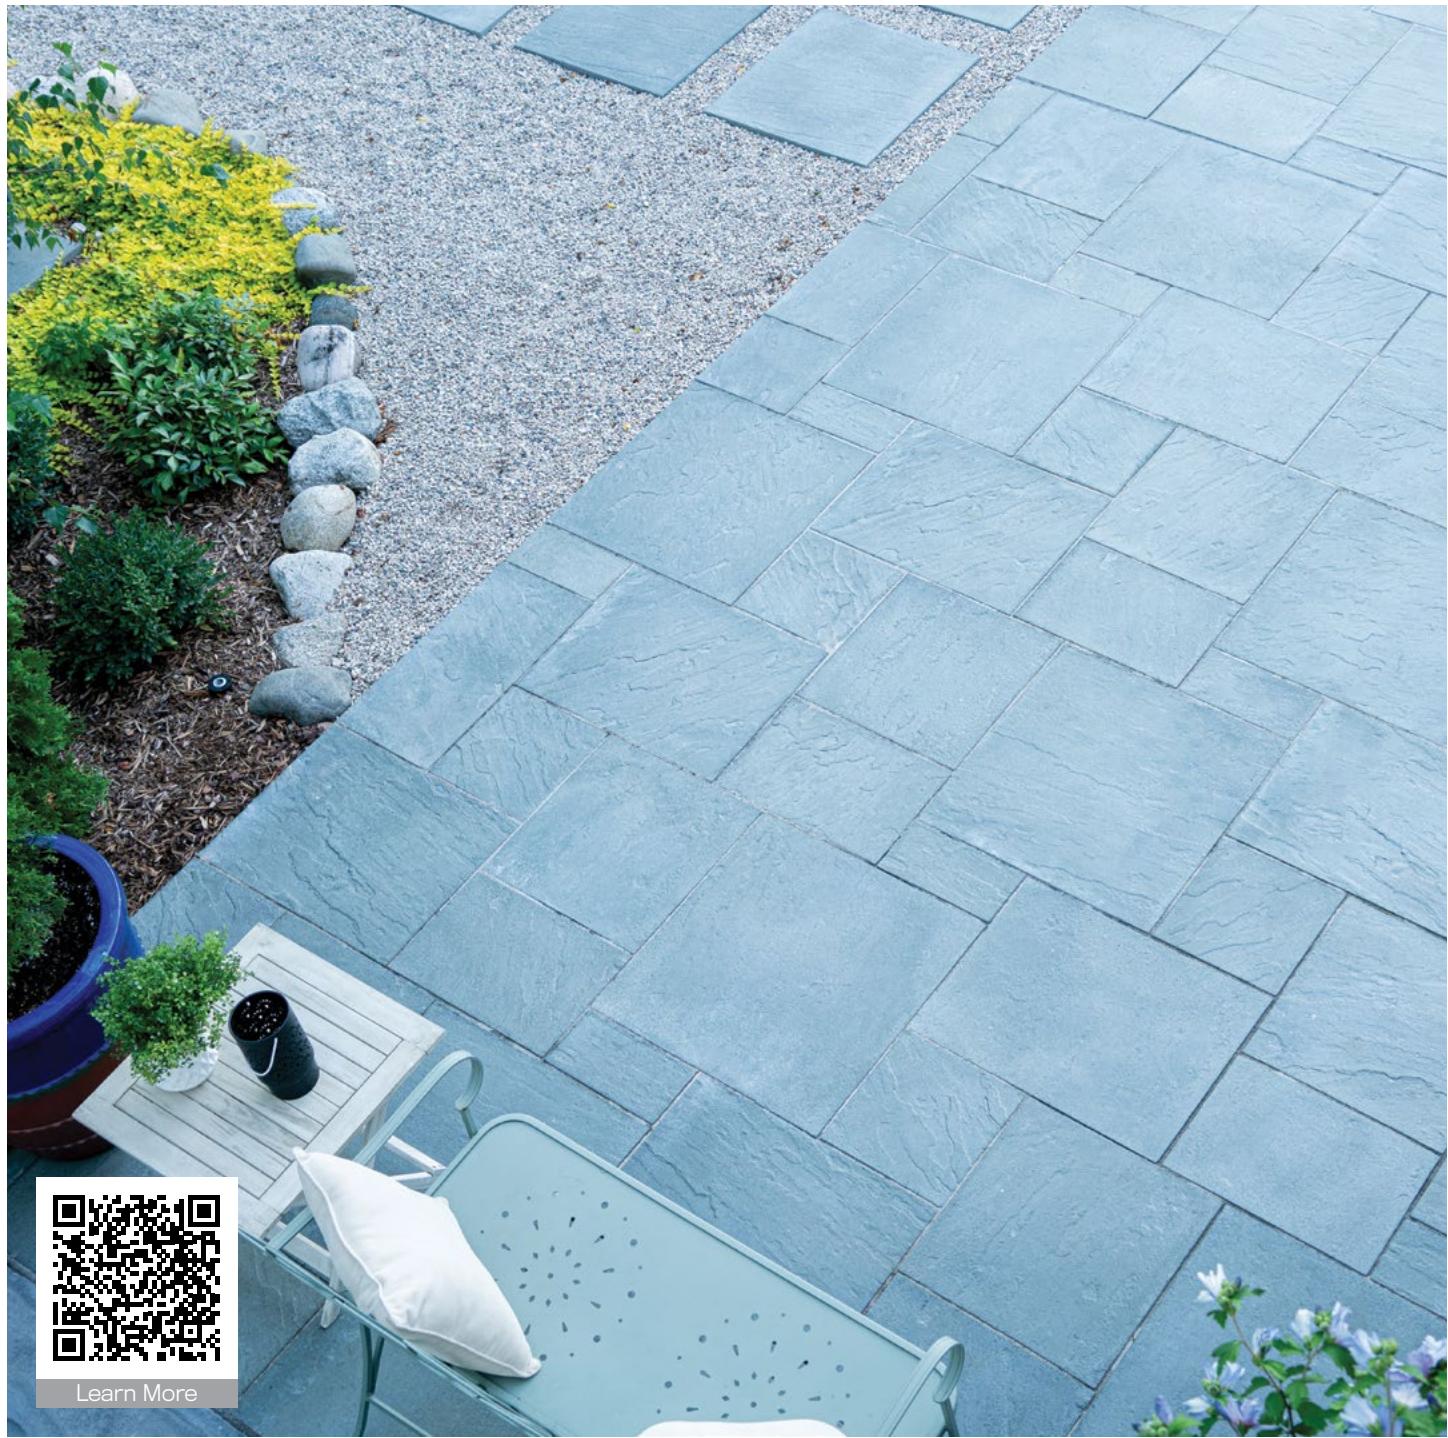

HIGHFORMAT.COM
(877) 777-6558

FEATURES

- Six unique shapes with 24 unique stone textures
- Uniform thickness and accurate dimensions translates into fast installation and a beautiful end result

MATERIAL

ROSETTA® WETCAST
VIBRALOCK®

COLOR OPTIONS

BLUESTONE



FOND DU LAC



SLATE GRAY



LIMESTONE




TERRAIN




Refer to our website for the most recent color offerings.

PATTERN

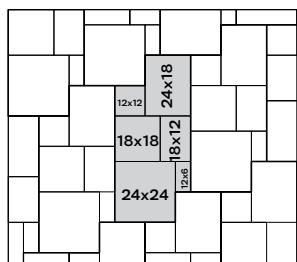


PALLET

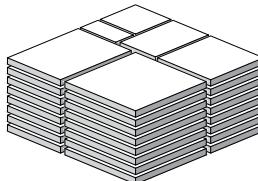

Weight: 2,350± lbs (inc. pallet)
Coverage: 98 sq ft
Layers Per Pallet: 8
Section: 12.25 sq ft per layer


UNIT: 24 X 24

Dimensions: 24" L x 24" W x 2" H
Weight: 96 lbs
Coverage: 4 sq ft
Units Per Pallet: 8




UNIT: 24 X 18

Dimensions: 24" L x 18" W x 2" H
Weight: 72 lbs
Coverage: 3 sq ft
Units Per Pallet: 8




UNIT: 18 X 18

Dimensions: 18" L x 18" W x 2" H
Weight: 54 lbs
Coverage: 2.25 sq ft
Units Per Pallet: 8




UNIT: 18 X 12

Dimensions: 18" L x 12" W x 2" H
Weight: 36 lbs
Coverage: 1.5 sq ft
Units Per Pallet: 8




UNIT: 12 X 12

Dimensions: 12" L x 12" W x 2" H
Weight: 24 lbs
Coverage: 1 sq ft
Units Per Pallet: 8



UNIT: 12 X 6

Dimensions: 12" L x 6" W x 2" H
Weight: 12 lbs
Coverage: .5 sq ft
Units Per Pallet: 8




NOTES FOR TYPICAL RESIDENTIAL INSTALLATION

This page shows a typical detail for Dimensional Flagstone.

- This drawing is for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.
- Block size and placement shown are for reference only, individual blocks vary with installation pattern and product.
- Section shown is the minimum recommendation for pedestrian loading. Projects with heavier traffic or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
- Provide adequate surface drainage to prevent ponded water.

Not suitable for vehicular traffic.

TYPICAL RESIDENTIAL INSTALLATION

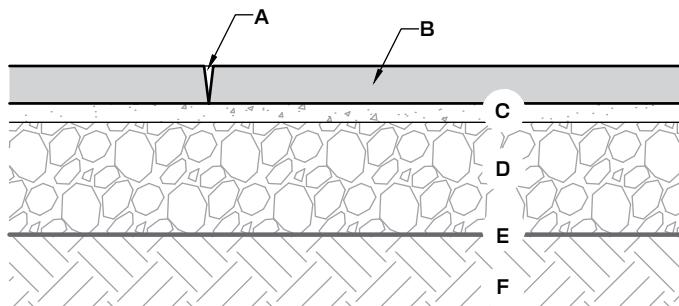

- A. Polymeric jointing sand between slabs
- B. Dimensional Flagstone Slabs (2" (51 mm) thick)
- C. Coarse bedding sand (1" (25 mm) thick)
- D. Compacted gravel base (6" (150 mm) thick)
- E. Woven geotextile (optional)
- F. Suitable, compacted subgrade