



**HIGH
FORMAT®**

TETRA THERMAL SLABS



Learn More

HIGHFORMAT.COM
(877) 777-6558

FEATURES

- Large format landscape slabs with a thermal texture and a salt-proof surface.
- Made with TEKTRAMAT® for unsurpassed durability, with four times the compressive strength and twice the flexural strength of normal concrete.
- Generous size and light weight results in rapid installation.


MATERIAL TEKTRAMAT®

COLOR OPTIONS




Refer to our website for the most recent color offerings.

PALLET

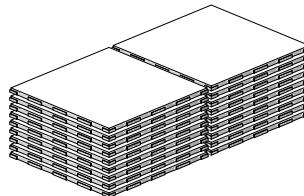


Dimensions: 66" L x 48" W x 24" H
Weight: 1,850 lbs (inc. pallet)
Coverage: 112.5 sq ft




UNIT
Dimensions: 30" L x 30" W x 1.25" H
Weight: 95 lbs
Coverage: 6.25 sq ft
Units Per Pallet: 18

PATTERNS


STACK BOND




STACK BOND (4" JOINT)

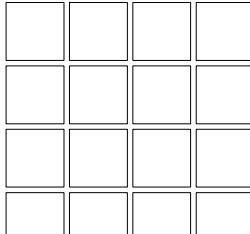

RUNNING BOND



RUNNING BOND (4" JOINT)

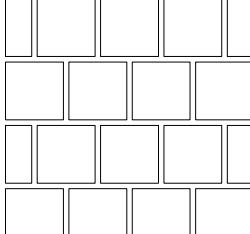


GENERAL NOTES FOR TYPICAL RESIDENTIAL INSTALLATION

This page shows a typical detail for Tetra Slabs.

- This drawing is for preliminary reference only (not for final construction).
- Final designs for construction **must be prepared by a registered professional engineer** using the actual conditions of the proposed site and loads.
- Block size and placement shown are for reference only, individual blocks vary with installation pattern.
- Section shown is the minimum recommendation for pedestrian loading. Projects with heavier traffic or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
- Provide adequate surface drainage to prevent ponded water.

Not suitable for vehicular traffic.

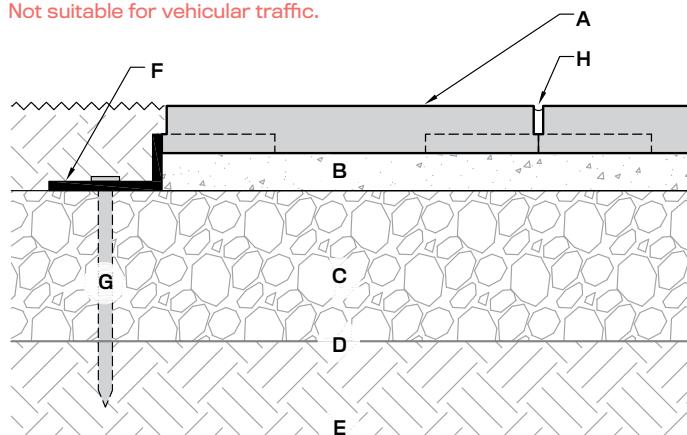

- A. Tetra Slab, 1.25" (32mm) thick
- B. Bedding sand (ASTM C33) min. 1" (25mm)
- C. Dense graded base, min. 4" (100mm), compacted
- D. Woven geotextile fabric (recommended)
- E. Compacted subgrade soil
- F. Low profile paver edge restraint
- G. Steel spike
- H. Joint sand (ASTM C144)