



**HIGH
FORMAT®**

DIMENSIONAL FLAGSTONE



Learn More

HIGHFORMAT.COM
(877) 777-6558



FEATURES

- Six unique shapes with 24 unique stone textures
- Uniform thickness and accurate dimensions translates into fast installation and a beautiful end result

MATERIAL


ROSETTA® WETCAST
VIBRALOCK®

COLOR OPTIONS

BLUESTONE




FOND DU LAC



SLATE GRAY



LIMESTONE




TERRAIN








Refer to our website for the most recent color offerings.

PATTERN

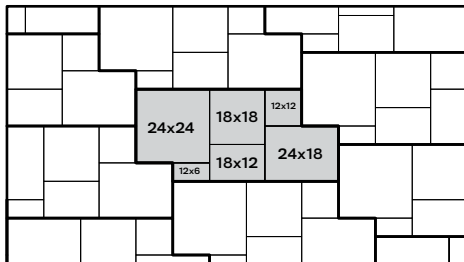

PALLET



Weight: 2,350± lbs (inc. pallet)
Coverage: 98 sq ft
Layers Per Pallet: 8
Section: 12.25 sq ft per layer

UNIT: 24 X 24

Dimensions: 24"L x 24"W x 2"H
Weight: 96 lbs
Coverage: 4 sq ft
Units Per Pallet: 8

UNIT: 24 X 18

Dimensions: 24"L x 18"W x 2"H
Weight: 72 lbs
Coverage: 3 sq ft
Units Per Pallet: 8

UNIT: 18 X 18

Dimensions: 18"L x 18"W x 2"H
Weight: 54 lbs
Coverage: 2.25 sq ft
Units Per Pallet: 8

UNIT: 18 X 12

Dimensions: 18"L x 12"W x 2"H
Weight: 36 lbs
Coverage: 1.5 sq ft
Units Per Pallet: 8

UNIT: 12 X 12

Dimensions: 12"L x 12"W x 2"H
Weight: 24 lbs
Coverage: 1 sq ft
Units Per Pallet: 8

UNIT: 12 X 6

Dimensions: 12"L x 6"W x 2"H
Weight: 12 lbs
Coverage: .5 sq ft
Units Per Pallet: 8


NOTES FOR TYPICAL RESIDENTIAL INSTALLATION

This page shows a typical detail for Dimensional Flagstone.

- This drawing is for preliminary reference only (not for final construction).
- Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.
- Block size and placement shown are for reference only, individual blocks vary with installation pattern and product.
- Section shown is the minimum recommendation for pedestrian loading. Projects with heavier loads or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
- Provide adequate surface drainage to prevent ponded water.

Not suitable for vehicular traffic.

TYPICAL RESIDENTIAL INSTALLATION

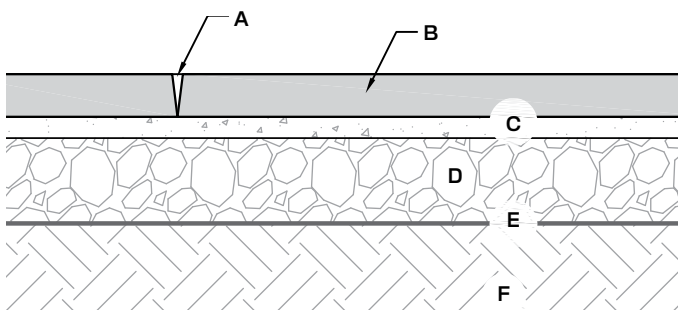

- Polymeric jointing sand between slabs
- Dimensional Flagstone Slabs (2" thick)
- Bedding sand (ASTM C33 Fine Aggregate) 1" thick
- Dense graded aggregate base (ASTM D2940) min. 4" thick, compacted
- Woven geotextile (optional)
- Suitable, compacted subgrade