



HIGH
FORMAT®

SILVEREK



Learn More

HIGHFORMAT.COM
(877) 777-6558

FEATURES

- High-quality natural travertine pavers in a mixture of taupe and gray shades
- Antiqued finish has aged look with smooth surface and tumbled edges

MATERIAL

NATURAL STONE: TRAVERTINE

TEXTURE

ANTIQUED

**TECHNICAL SPECIFICATIONS**

Call for testing.

PATTERNS | UNITS


- French Pattern: Blend of 8"x8", 8"x16", 16"x16", 16"x24" at 1.25"H

176 s.f. per crate / 2,850± lbs

Contact your local rep for additional sizes and finishes.

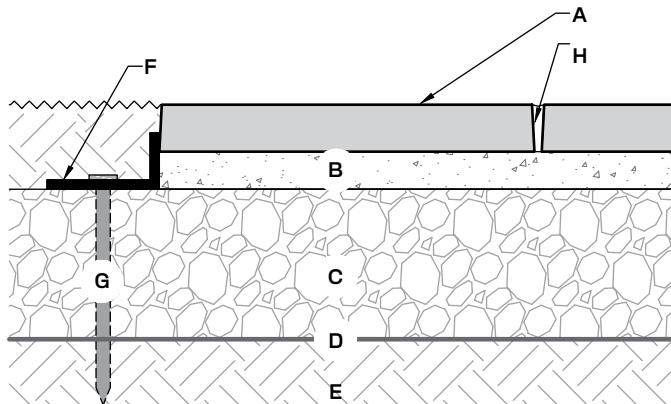
PATTERN

FRENCH

**NOTES FOR TYPICAL RESIDENTIAL INSTALLATION**

This page shows typical installations for pavers.

- Drawings are for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.**
- Block size and placement shown are for reference only, individual blocks vary with installation pattern.
- Section shown is the minimum recommendation for pedestrian loading. Projects with heavier traffic or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
- Provide adequate surface drainage to prevent ponded water.

TYPICAL RESIDENTIAL PEDESTRIAN INSTALLATION

- A. Natural stone pavers, thickness varies
- B. 1" screed clean angular stone, 1/8" to 1/4"
- C. 6" of 3/4" clean stone, compacted in 3-4" lifts
- D. Woven geotextile fabric (recommended)
- E. Compacted subgrade soil
- F. Low profile paver edge restraint
- G. Steel spike
- H. Optional joint sand (ASTM C144)