


PRELIMINARY DETAIL
NOT FOR FINAL CONSTRUCTION

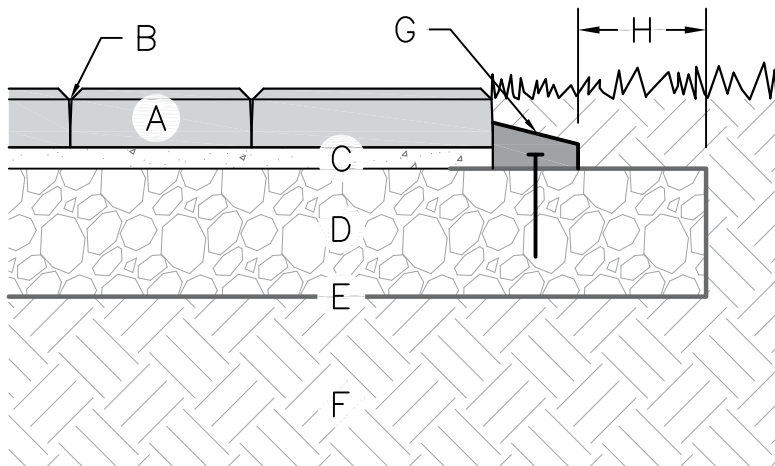

TYPICAL INSTALLATION
(NO SCALE)

- A. New Mission Pavers (2.75" thick)
- B. Polymeric jointing sand between pavers
- C. Bedding sand (ASTM C33 Fine Aggregate) 1" thick
- D. Dense Graded Aggregate Base (ASTM D2940) min. 6" thick, compacted
- E. Woven geotextile (as required)
- F. Compacted suitable subgrade
- G. Plastic or metal edging strip
- H. 6" (152 mm) minimum

Notes:

1. Section shown are the minimum recommendations for residential drives and pedestrian loading.
2. Commercial projects with vehicular traffic or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
3. Adequate surface drainage should be provided to prevent ponded water.
4. The section is not intended for permeable pavement applications.

This drawing is for reference only. Determination of the suitability and/or manner of use of any details contained in this document is the sole responsibility of the design engineer of record. Final project designs, including all construction details, shall be prepared by a licensed professional engineer using the actual conditions of the proposed site.

DRAWN BY: BOB/CARISSA	TITLE: NEW MISSION TYPICAL PEDESTRIAN AND RESIDENTIAL VEHICULAR DETAIL	HIGH FORMAT [®] 05481 US 31 SOUTH, CHARLEVOIX, MI 49720 877-777-6558 • highformat.com
APPROVED BY:		
DATE: 03/06/2026		
SHEET NO.: 1 OF 1	DRAWING TITLE: New Mission Section.dwg	