PRELIMINARY DETAIL
NOT FOR FINAL CONSTRUCTION

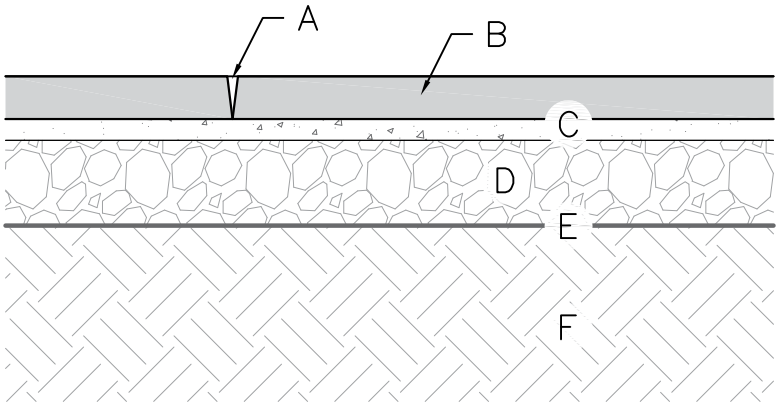

TYPICAL PEDESTRIAN INSTALLATION

(NO SCALE)

A. Polymeric jointing sand between slabs
B. Dimensional Flagstone Slabs (2" thick)
C. Bedding sand (ASTM C33 Fine Aggregate) 1" thick
D. Dense graded aggregate base (ASTM D2940) min. 4" thick, compacted
E. Woven geotextile (optional)
F. Suitable, compacted subgrade

Notes:
1. Section shown are the minimum recommendations for pedestrian loading.
2. Projects with heavier loads or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
3. Provide adequate surface drainage to prevent ponded water.
4. Slabs shown schematically – plan dimensions vary between product.

This drawing is for reference only. Determination of the suitability and/or manner of use of any details contained in this document is the sole responsibility of the design engineer of record. Final project designs, including all construction details, shall be prepared by a licensed professional engineer using the actual conditions of the proposed site.

DRAWN BY:	BOB/CARISSA	TITLE:	DIMENSIONAL FLAGSTONE TYPICAL PEDESTRIAN INSTALLATION
APPROVED BY:			
DATE:	03/06/2026		
SHEET NO.:	1 OF 1	DRAWING TITLE:	Flagstone Section.dwg

HIGH FORMAT®
05481 US 31 SOUTH, CHARLEVOIX, MI 49720
877–777–6558 • highformat.com