



**HIGH
FORMAT®**

METRO SLABS



Learn More

HIGHFORMAT.COM
(877) 777-6558

FEATURES

- Large footprint and lightweight for rapid installation
- Made with TEKTRAMAT® for unsurpassed durability and a salt-proof surface, with four times the compressive strength and twice the flexural strength of normal concrete
- Stylish modern aesthetic, featuring clean lines and thermalled stone textures





MATERIAL TEKTRAMAT®

COLOR OPTIONS



Refer to our website for the most recent color offerings.

PALLET

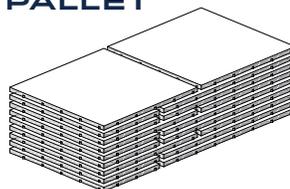

Dimensions: 66"L x 48"W x 24"H
Weight: 1,850 lbs (inc. pallet)
Coverage: 112.5 sq ft

UNIT: 18 X 30

Dimensions: 30"L x 18"W x 1.25"H
Weight: 60 lbs
Coverage: 3.75 sq ft
Units Per Pallet: 6


UNIT: 30 X 30

Dimensions: 30"L x 30"W x 1.25"H
Weight: 100 lbs
Coverage: 6.25 sq ft
Units Per Pallet: 6

UNIT: 42 X 30

Dimensions: 42"L x 30"W x 1.25"H
Weight: 140 lbs
Coverage: 8.75 sq ft
Units Per Pallet: 6

PATTERN

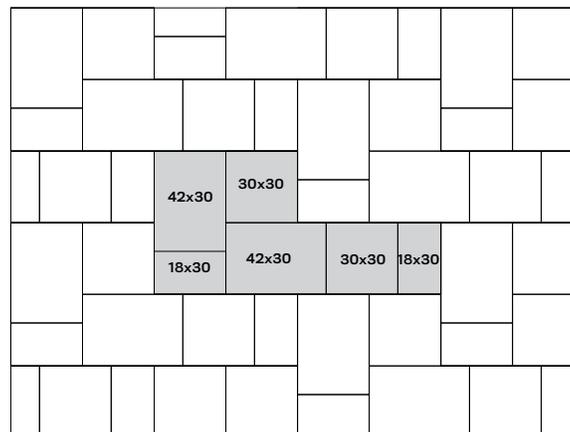


GENERAL NOTES FOR TYPICAL RESIDENTIAL INSTALLATION

This page shows a typical detail for Metro

- This drawing is for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.**
- Block size and placement shown are for reference only, individual blocks vary with installation pattern.
- Section shown is the minimum recommendation for pedestrian loading. Projects with heavier loads or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
- Provide adequate surface drainage to prevent ponded water.

Not suitable for vehicular traffic.

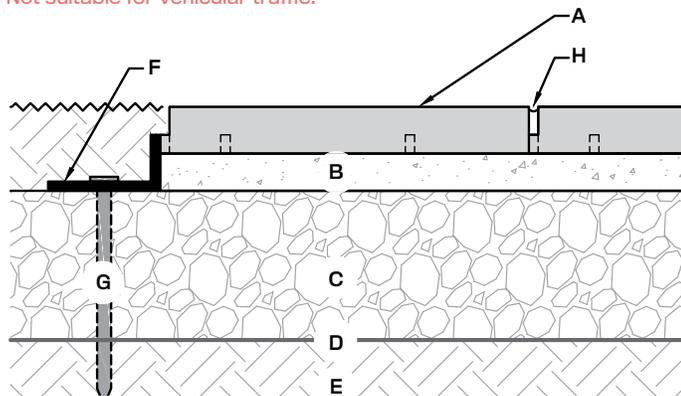

- A. Metro Slab, 1.25" thick
- B. Bedding sand (ASTM C33 Fine Aggregate) 1" thick
- C. Dense graded aggregate base (ASTM D2940) min. 4" thick, compacted
- D. Woven geotextile fabric (recommended)
- E. Compacted subgrade soil
- F. Low profile paver edge restraint
- G. Steel spike
- H. Joint sand (ASTM C144)