



# HIGH FORMAT®

## TETRA NATURAL CLEFT SLABS



Learn More

**HIGHFORMAT.COM**  
**(877) 777-6558**

# TETRA NATURAL CLEFT SLABS





## FEATURES

- Large format landscape slabs with a natural cleft texture and a salt-proof surface.
- Made with TEKTRAMAT® for unsurpassed durability, with four times the compressive strength and twice the flexural strength of normal concrete.
- Generous size and light weight results in rapid installation.

## MATERIAL TEKTRAMAT®

## PALLET




Dimensions: 66"L x 48"W x 24"H  
Weight: 1,850 lbs (inc. pallet)  
Coverage: 112.5 sq ft

### UNIT

Dimensions: 30"L x 30"W x 1.25"H  
Weight: 95 lbs  
Coverage: 6.25 sqft  
Units Per Pallet: 18

## COLOR OPTIONS

BLUESTONE



SUMMIT



DUNE




CHARCOAL




Refer to our website for the most recent color offerings.

## PATTERNS


### STACK BOND




### STACK BOND (4" JOINT)



### RUNNING BOND



### RUNNING BOND (4" JOINT)




## GENERAL NOTES FOR TYPICAL RESIDENTIAL INSTALLATION

This page shows a typical detail for Tetra Slabs.

- This drawing is for preliminary reference only (not for final construction).
- **Final designs for construction must be prepared by a registered professional engineer using the actual conditions of the proposed site and loads.**
- Block size and placement shown are for reference only, individual blocks vary with installation pattern.
- Section shown is the minimum recommendation for pedestrian loading. Projects with heavier traffic or sites with poor soil conditions may require thicker gravel base, concrete curb edge restraint, and/or sand subbase.
- Provide adequate surface drainage to prevent ponded water.

**Not suitable for vehicular traffic.**

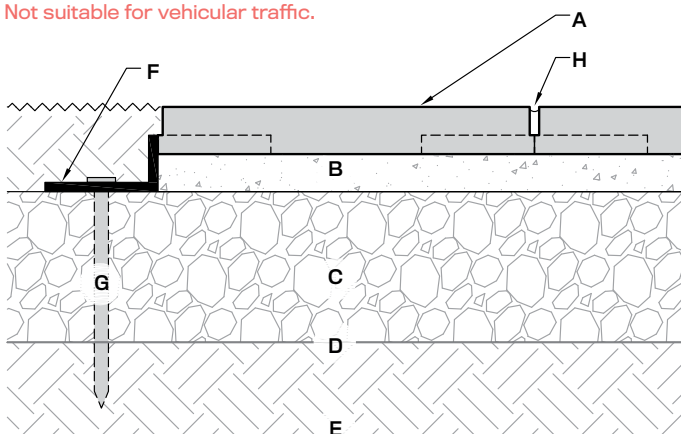

- A. Tetra Slab, 1.25" (32mm) thick
- B. Bedding sand (ASTM C33) min. 1" (25mm)
- C. Dense graded base, min. 4" (100mm), compacted
- D. Woven geotextile fabric (recommended)
- E. Compacted subgrade soil
- F. Low profile paver edge restraint
- G. Steel spike
- H. Joint sand (ASTM C144)