



KODAH® FIRE PIT



HIGHFORMAT.COM
(877) 777-6558

FEATURES

- Featuring the modern, clean aesthetic of snapped limestone
- Includes 16 wetcast concrete stones and a 12-gauge steel liner

MATERIAL

WETCAST

COLOR OPTIONS

FOND DU LAC



SLATE GRAY



LIMESTONE




TERRAIN




Refer to our website for the most recent color offerings.

PALLET

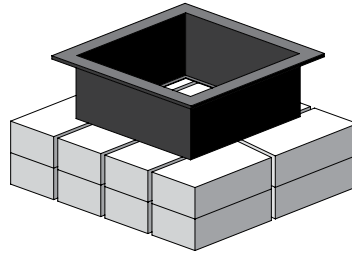

Dimensions: 48"x42"x30"
Weight: 1,700 lbs (inc. pallet)

INSTALLED PLAN VIEW




Finished
Dimensions: 51"L X 51"W X 12"H

INSTALLATION NOTES

1. Familiarize yourself with the construction details shown on this page.
2. Mark out the location for your fire pit. Note dimensions shown are nominal so mark an area slightly larger than shown.
3. Excavate for drain stone base (approx. 6")
4. Fill excavated area with drain stone, level, and compact.
5. Place blocks according to the installation detail (measure across the diagonals to ensure squareness)
6. Once all blocks are laid out, place the steel liner into the center opening. It will rest atop the blocks.
7. Fill the firepit opening with additional drainstone 1" above the bottom of the liner to secure it into place.
8. **WARNING!** Do not place the fire pit directly atop a patio surface. Instead, the fire pit should be "cut in" to the patio surface to avoid damage to the patio caused by conductive heat transfer.

Kodah® Fire Pit Kits are also available in gas-burning and Breco® smokeless wood-burning configurations.

TYPICAL INSTALLATION

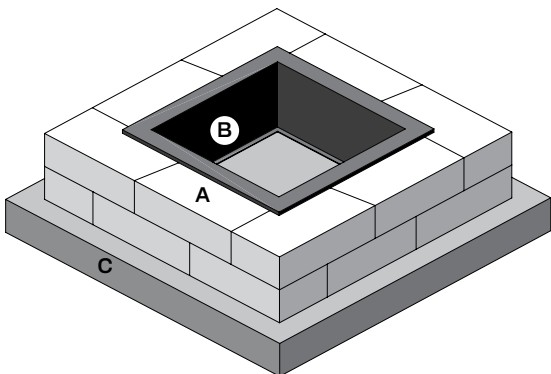

- A. Kodah® Wall Blocks (overlap at corners as shown, and abut matching block tapers)
- B. 12-gauge steel ring (28"x28" opening), 12" tall, hangs directly on blocks
- C. 6" minimum drainstone base underneath